





FEATURES

- Multi-purpose QUAD control box
- Free Input voltage (DC 10V ~ DC 40V)
- NTSC / PAL Compatible
- 4 camera inputs
- 1 AV input
- 1 AV output
- Shutter camera compatible (CA1~CA4)
- Various Display mode (Single / Split / Triple / Quad)
- Auto Picture function (5 trigger inputs)
- Trigger Output (12V DC, max. 100mA)
- Auto Scan function
- Simple OSD

DISPLAY MODE

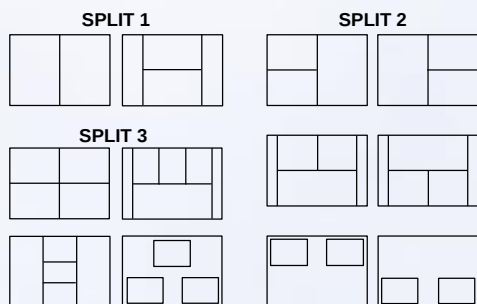

CONNECTION

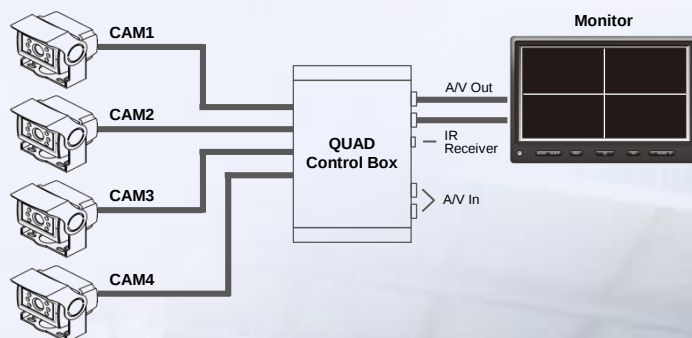

SPECIFICATIONS

Power Input	DC 10V ~ 40V Input
Power Consumption	Max. 25watt
Video System	NTSC / PAL Compatible
Connection	◇ 4 Camera Inputs : Mini DIN4, 1Vp-p 75Ω ◇ 1 A/V Input : - Video : RCA, CVBS, 1Vp-p, 75Ω - Audio : RCA, 150mVRMS ◇ 1 AV output : - Video : RCA, CVBS, 1Vp-p, 75Ω - Audio : RCA, 150mVRMS
Dimension	152(W) x 102(H) x 25(D)mm
Weight	360g